


# DocuSheeter VP 6000

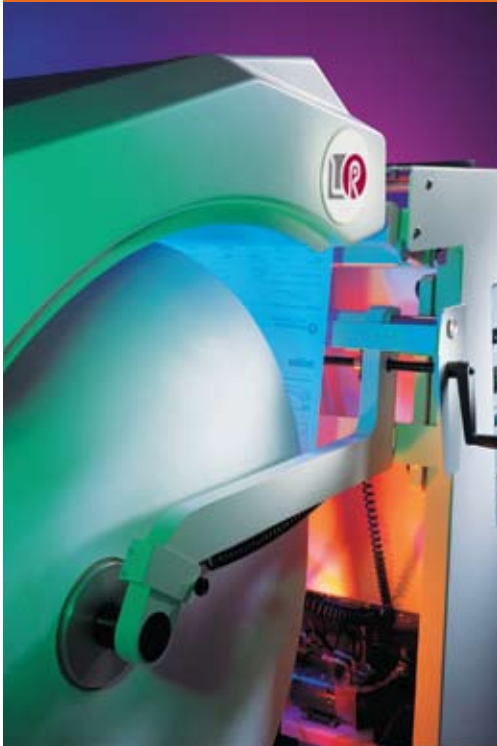

The DocuSheeter VP 6000 works in conjunction with the Océ VarioPrint 6000 digital printer and consists of an unwind, cutter and sheet transport.

- Feeds Océ VarioPrint 6000
- Reliable roll feeding
- Lower paper costs
- Any form size
- Optional hole punch

## Making VarioPrint very productive

Increase your VarioPrint™ 6000 throughput while lowering downtime, operator involvement and paper costs. The DocuSheeter™ VP 6000 roll feed system feeds single sheets on demand to the Océ VarioPrint 6000 digital printing system hour after hour.

The DocuSheeter VP 6000 runs every form size and basis weight the printer can handle and, with 60,000 sheets per roll, it delivers maximum productivity and reliability. The system can switch form sizes between letter and tabloid, or between A4 and A3, without changing rolls. DocuSheeter cuts to final sheet size for big savings on odd sizes, and saves you even more

on lightweight and other non-standard papers. The optional hole punch is perfect for ring binder applications, and running pre-printed bills and statements is simple with optional print register.

Lasermax Roll Systems solutions increase productivity, cut labor and paper costs, and even make new applications possible. Global service and around-the-clock support help ensure our reputation as the industry's reliability leader. Count on Lasermax Roll Systems to help you do more with digital print.


# DocuSheeter VP 6000

The DocuSheeter VP 6000 is designed especially to feed cut sheets from rolls on demand to Océ VarioPrint 6000 printers and includes an unwind, cutter and sheet transport.

The user-friendly unwind includes automatic decurling, no-lift roll mounting and a self-centering design. Rolls up to 50" in diameter are loaded quickly and easily into the unwind directly from an optional roll cart. The unwind feeds a paper web to the DocuSheeter's cutter, which then accurately produces consistent, square sheets for on-demand feeding. Form lengths are easily changed with the touch of a button. The reliable sheet transport feeds single sheets to the printer, on demand, without diminishing standard input tray capacity. No buffer means reliable feeding with virtually no waste when changing applications.

The DocuSheeter VP 6000 is compatible with Océ VarioPrint 6160 and 6250 digital printers. The system can be combined with finishing devices such as self-mailers, gluers/folders, stitchers and binders to provide complete end-to-end solutions. All components use standard power, are mobile, modular, compact, and designed to dramatically improve workflow.

## Optional Capabilities



Optional hole punch.

### Hole Punch

Operator selectable in-line US 3-Hole or A4 2/4-Hole. Avoid changing stock, save money on paper, and reduce inventory. Other punch patterns are available.

## Print Register

Run pre-printed forms from a roll.

## Running Micro-Perforator

Perforate in process direction to create tear-off remittance slips or other special applications, for significant savings on special stocks.

## Right-hand and left-hand infeeds

For space-planning flexibility.



Easy transport.

## Roll carts

Move, store and load rolls with greater efficiency.

## Specifications

### Performance / Media

<b>Paper weight</b>	16# bond–110# index	
	60–200 gsm	
<b>Roll diameter</b>	4"–50"	100 mm–1270 mm
<b>Roll weight max.</b>	1500 lbs	680 kg
<b>Core size</b>	3, 5, or 6"	70, 150, or 200 mm
<b>Web width</b>	8.27"–12.6"	210 mm–320 mm
<b>Sheet size</b>	8.27" x 8" to 12.6" x 19.2"	210 x 203 mm to 320 x 488 mm

### Electrical

<b>Power</b>	110-120 VAC 50/60 Hz, 6A
	or 220-240 VAC 50/60 Hz, 4A


### Environmental

<b>Temperature</b>	72° ± 4° F	22° ± 2° C
Min.	60° F	15° C
Max.	80° F	27° C
<b>Humidity</b>	50% ± 10%	
<b>Acoustics</b>	Less than 90 dbA	

### Agency Approvals

UL, CUL, FCC, CE

## Configuration Example

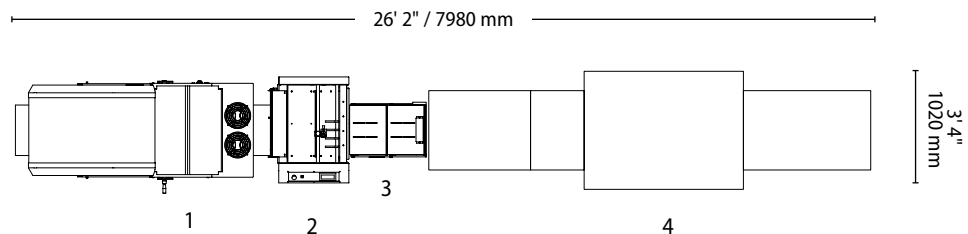

- 1 Unwind
- 2 Cutter
- 3 Sheet Transport
- 4 Océ VarioPrint 6000